




Tel: 86-577-62518886 / E-mail: [sales@msrelay.com](mailto:sales@msrelay.com) <http://www.relays.cc>

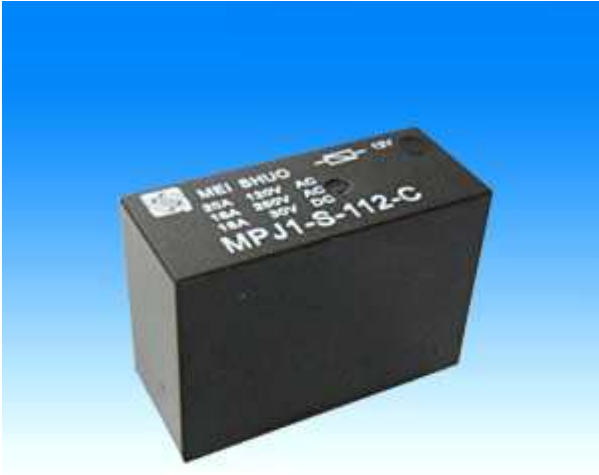

## Mini relay JQX-14FF (MPJ1)

Contact form: 1A 1B 1C

Coil voltage: 6-24VDC

Contact resistance: 100mΩ

Contact rating: 10A 250VAC/30VDC

Max.switching voltage: 250VAC/30VDC

Max.switching current: 10A

Max.switching power: 2000VAC/240W

Mechanical life:  $1 \times 10^7$

Electrical life:  $1 \times 10^5$

Insulation resistance: 1000MΩ(500V)

Dielectric strength between coil & contacts: 5000VAC

Dielectric strength between contacts: 1000VAC

Operate time: max.15ms

Release time: max.5ms

Ambient temperature: -40°C - +70°C

Coil power :0.72w

Termination:PCB

Weight:13g

Outline dimensions: 29.0\*12.6\*20.6mm