




Tel: 86-577-62518886 / E-mail: sales@msrelay.com <http://www.relays.cc>

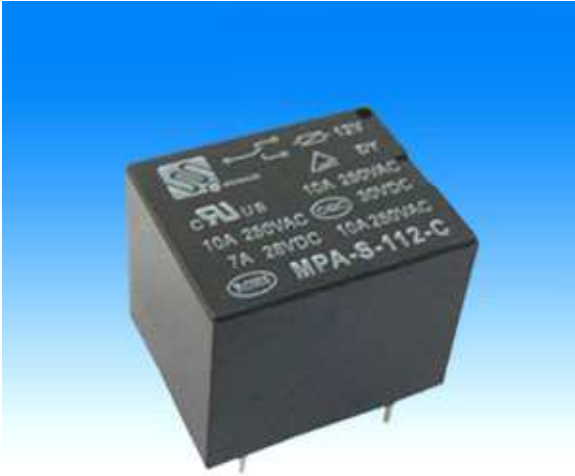

PCB relay JQX-3FF (MPA)

Contact form: 1A 1B 1C

Coil voltage: 6-72VDC

Contact resistance: 100mΩ

Contact rating: 10A 250VAC/7A 28VDC

Max.switching voltage: 250VAC/30VDC

Max.switching current: 15A/10A

Max.switching power: 2500VAC/300W

Mechanical life: 1×10^7

Electrical life: 1×10^5

Insulation resistance: 1000MΩ(500V)

Dielectric strength between coil & contacts: 1500VAC

Dielectric strength between contacts: 750VAC

Operate time: max.10ms

Release time: max.5ms

Ambient temperature: -40°C - +85°C

Coil power :0.36w ,0.6w ,0.8w

Termination:PCB

Weight:10g

Outline dimensions: 19.0*15.5*15.0mm

Certificates: RoHS,TUV,UL,CQC